


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
  - 1.1 FREQUENCY RANGE: DC to 18.0 GHz
  - 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C  
DERATED LINEARLY TO 0 WATTS @ +125°C
  - 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
  - 1.4 IMPEDANCE: 50 OHMS
  - 1.5 VSWR: 1.10+0.01f(GHz)

2.0 MARKING: MARK UNIT AS SHOWN  
(REF.: INK-09035-27-32)

3.0 DIMENSIONS IN PARENTHESIS ARE IN  
MILLIMETERS.

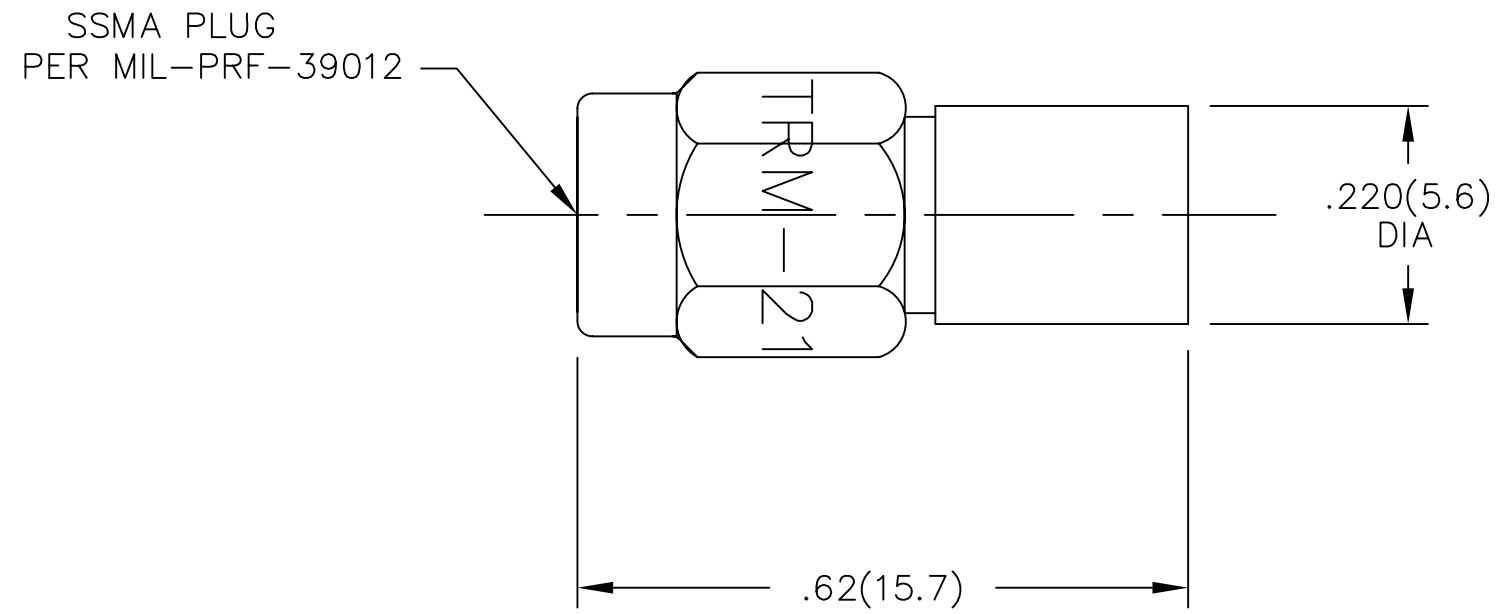

REV.	DESCRIPTION	DATE
-	RELEASED	9/23/98
-1	ADDED TITLEBLOCK	11/14/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1*	FSCM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION - SSMA PLUG	
	DRAWN/DATE L.BROWN 8/19/98	ENG./DATE G.KOZAK 9/15/98	DRAWING NUMBER TRM-2180-MO-SSM-00	
	CHECKED/DATE	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1