


NOTE:

1. ALL DIMENSIONS IN mm [INCH].
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 150MILLIAMP, 250VAC/DC
350MILLIAMP, 110VAC/DC
6. CONTACT RATING (NON-SWITCHING) 5A
7. OPERATING FORCE 425± 100CM/STANDARD
8. OPERATING TEMP: -30°C TO 85°C
- ▲ 9. CIRCUIT SP: 12 POSITION 30° INDEX
10. DIELECTRIC STRENGTH: 1000V RMS MIN.@ SEA LEVEL.
- ▲ 11. HARDWARE SUPPLIED ON SWITCH: LOCKWASHER, HEXNUT
12. ▲ DENOTES CRITICAL PARAMETER.

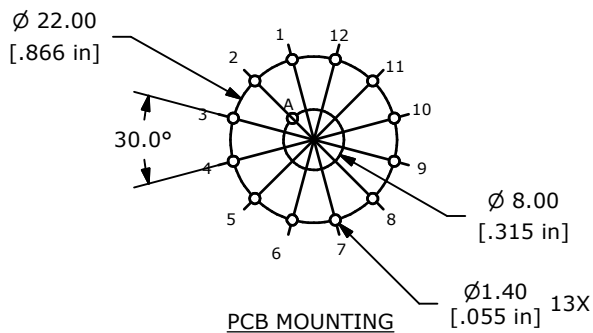

| | | | | |
|-----|--------|--------------------------|----------|-----|
| G | 20636 | ADD PCB MOUNTING DRAWING | 06/07/12 | drg |
| F | 14501 | REVISED & REDRAWN | 11/12/04 | AR |
| REV | PCR NO | DESCRIPTION | DATE | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

| | | | |
|----------------------|----------|-----|---------|
| | | | |
| TITLE KC52A30.001NPS | | | |
| SCALE | DATE | DR | DWG |
| 1.5:1 | 4/7/2010 | BLR | G510440 |
| | | | REV |
| | | | G |