


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	TAB SIZE	WIRE RANGE AWG (mm ²)	COLOR (NOTE 7)	MAX. INSUL.	DIMENSIONS in.[mm]		
					L ±.03 [0,76]	W ±.02 [0,51]	H ±.02 [0,51]
DNF18250FIBX	.250 x .032 [6,3 x 0,8]	22-18 [0,5-1,0]	RED	.210 [5,33]	.93 [23,6]	.35 [8,9]	.22 [5,5]
DNF18205FIBX	.205/.187 x .032 [5,2/4,8 x 0,8]	22-18 [0,5-1,0]	RED	.210 [5,33]	.87 [22,1]	.31 [7,9]	.22 [5,5]
DNF18206FIBX	.205/.187 x .020 [5,2/4,8 x 0,5]	22-18 [0,5-1,0]	RED	.210 [5,33]	.87 [22,1]	.31 [7,9]	.22 [5,5]
DNF14250FIBX	.250 x .032 [6,3 x 0,8]	16-14 [1,5-2,5]	BLUE	.240 [6,09]	.93 [23,6]	.35 [8,9]	.22 [5,5]
DNF14205FIBX	.205/.187 x .032 [5,2/4,8 x 0,8]	16-14 [1,5-2,5]	BLUE	.240 [6,09]	.87 [22,1]	.31 [7,9]	.22 [5,5]
DNF14206FIBX	.205/.187 x .020 [5,2/4,8 x 0,5]	16-14 [1,5-2,5]	BLUE	.240 [6,09]	.87 [22,1]	.31 [7,9]	.22 [5,5]

NOTES:

- USED FOR:
 - A. 600V MAX VOLTAGE RATING
 - B. TEMPERATURE RATING OF INSULATION: 105°C (221°F)
 - C. STRANDED COPPER WIRE ONLY
- INSTALLATION TOOL: CT-100A
- MATERIAL:
 - A. STAMPING-CDA 260 BRASS, TIN PLATED
 - B. HOUSING-TYPE 66 NYLON
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- COLORS ARE TRANSLUCENT

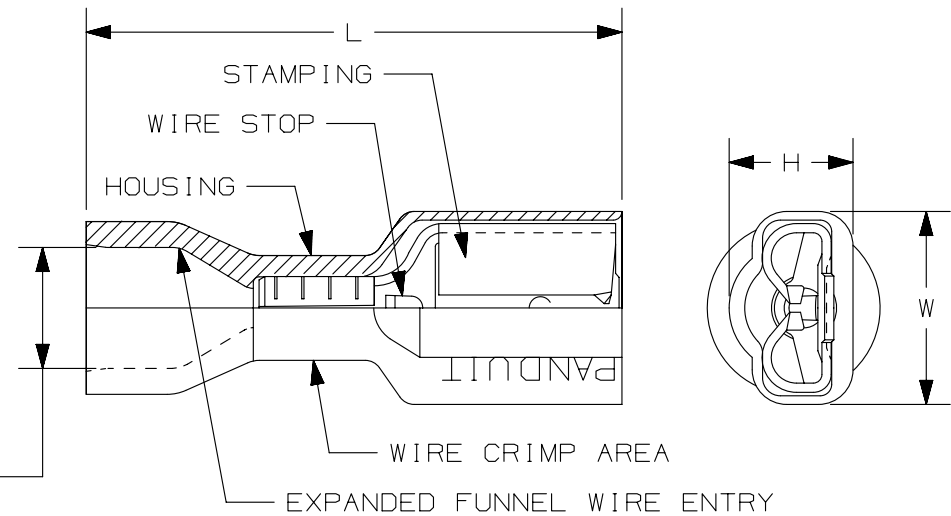

MAX. WIRE
INSUL. DIA

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04	2.10.14	JHNU	JHNU	RGB	REVISED NOTE 2	A41600
03	08.30.12	JBN	LCA	VMB	REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS	A41600
02	2/01	EJS			WIRE RANGE FOR PARTS DNF18250FIBX,205,206 WAS 0,5-1,5 UPDATED NOTE 1-B	

TITLE		FEMALE DISCONNECTS EXPANDED FULLY INSULATED NYLON, #22-14	
CUSTOMER DRAWING			
ITEM REVISION NAME		N41600BA/04	
DATASET FILE NAME		N41600BA_DC/04	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .1 [2.54] .xxx ± .005 [.13]		SEE NOTES	
.xx ± .01 [.25] ANGLES ± 5°		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		A41600	
DRAWN BY	DATE	CHK	SCALE
T SMA	-	LCA	N.T.S.
SHT 1 OF 1		SIZE	
A		A	

D10100DA/12