
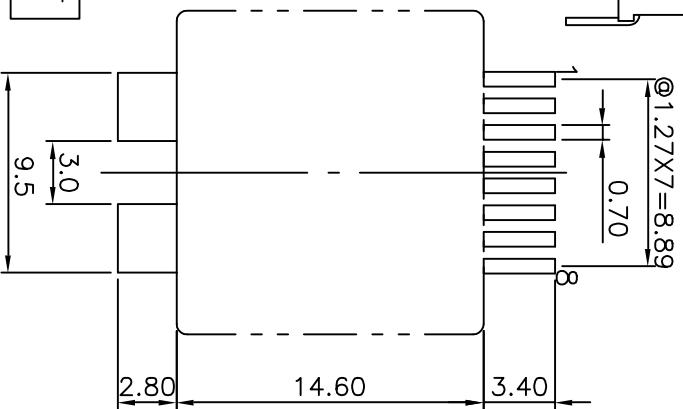
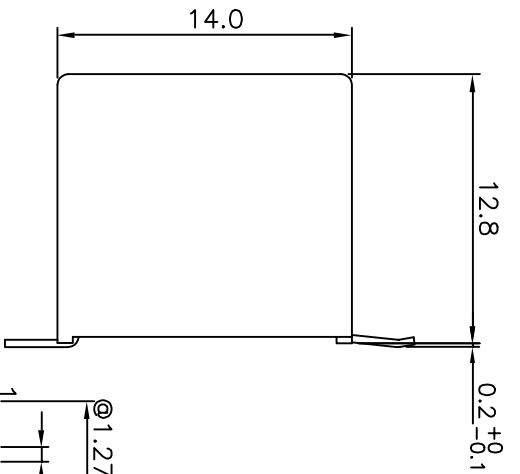


REVISION RECORD			
REV	ECO	DESCRIPTION	DATE
A		MODIFY P/N	08/14/08

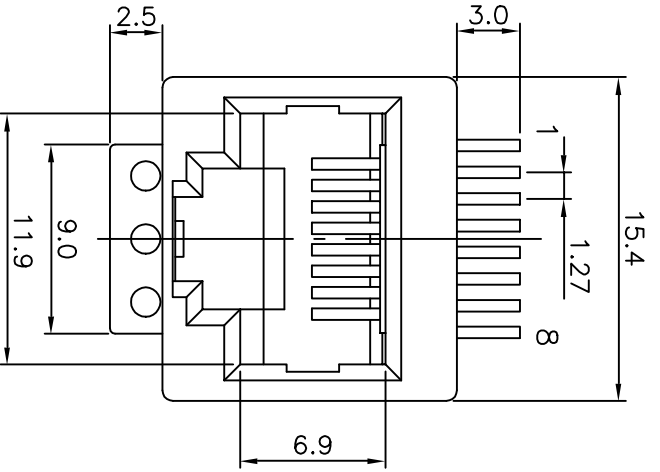

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60HZ, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : FR52 UL94 V-0
2. INSERT : FR52 UL94 V-0
3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE : -40°C TO +85°C.
  2. OPERATION: -40°C TO +85°C.
  3. SOLDERING TEMPERATURE : 255°C TO 265°C 5-10SECOND.
- MATES WITH MODULAR PLUG CONFORMING TO  
FCC PART 68, SUBPART F.  
UL FILE NO: E163191

ROHS P/N: E528X-P00XXX-L

- 2- 2C
- 4- 4C
- 6- 6C
- 8- 8C
- 1- 3u"
- 3- 15u"
- 5- 50u"
- 77- A05-0160-L BK
- 87- A05-0130-L BK
- 2- 6u"
- 4- 30u"

ROHS COMPLIANT

PCB LAYOUT (COMPONENT SIDE VIEW)

DETACHED LISTS		TOLERANCES EXCEPT AS NOTED	
MM	(INCH)	MM	(INCH)
±	±	0 ± 0.2	±
±	±	.00 ± 0.15	±
±	±	.000 ± 0.075	±
ANGLES ± 0.5		THIRD ANGLE PROJECTION	

DATE	05/12/05	DATE	05/12/05
CHG NAME		DATE	08/09/07/4
APPVLSHENG		DATE	08/09/07/4

TITLE	FULL RISE ELECTRONIC CO., LTD		
DRAWING NO.	G5523A26-LA		
PART NO.	SEE NOTE		
SCALE	DO NOT SCALE DRAWING		
SHEET	OF	REV	1